


INDICATION UNIT LS 310

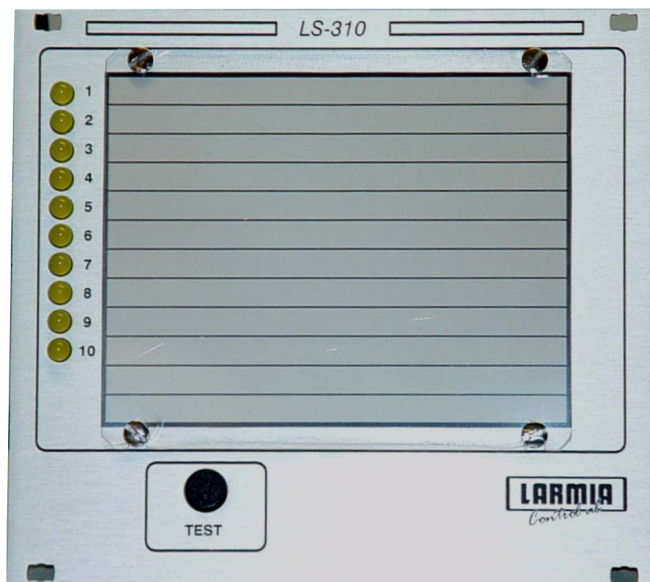

Function

10 indication inputs with yellow emitting diodes.
Continuous light upon indication.
Pushbutton for lamp test.
Terminal blocks are of plug in type.
The indication-text can easily be written with a typewriter.

Technical specification

Power requirement: Standard 24V AC/DC. Option 12V DC.
Current consumption: Max 110mA (in rest 10mA) at 24VAC.
Alarm contact current: 10mA.
Dimensions: B x H x D 142 (28TE) x 128 (3HE) x 45mm. (incl. plug in card).

Plug-in card

LS 321 One individual output relay (NO/NC) for each indication.

LARMIA CONTROL AB

POSTADDRESS
Box 83
SE-191 22 Sollentuna
Sweden

BESÖKSADRESS
Visiting address
Aniara platsen 4, 3tr

LEVERANSADRESS
Shipping address
Allfarvägen 3
SE-191 47 Sollentuna

TELEFON
Telephone
08-444 53 00
+46 8 444 53 00

TELEFAX
Facsimile
08-444 53 19
+46 8 444 53 19

EMAIL
Info@larmia.se
Website
www.larmia.se

LS 310 TERMINALBLOCK CONNECTION BLOCK A

<u>Terminal</u>	<u>Function</u>
1	Input signal 1
2	Input signal 2
/	/
/	/
/	/
10	Input signal 10
11	Input signal Common
12	Input voltage AC/DC
13	"
14	NC
/	/
/	/
/	/
22	NC

LS 310 TERMINALBLOCK CONNECTION BLOCK B

PLUG-IN CARD LS 320

<u>Terminal</u>	<u>Function</u>
1	Output relay 1 NO
2	" NO
/	/
/	/
/	/
17	Output relay 9 NO
18	" NO
19	Output relay 10 NO
20	" NO
21	Not in use
22	"

LARMIA CONTROL AB

POSTADDRESS
 Box 83
 SE-191 22 Sollentuna
 Sweden

BESÖKSADRESS
 Visiting address
 Aniaraplatsen 4, 3tr

LEVERANSADRESS
 Shipping address
 Allfarvägen 3
 SE-191 47 Sollentuna

TELEFON
 Telephone
 08-444 53 00
 +46 8 444 53 00

TELEFAX
 Facsimile
 08-444 53 19
 +46 8 444 53 19

EMAIL
 Info@larmia.se
 Website
 www.larmia.se