


ALARM UNIT LS 300

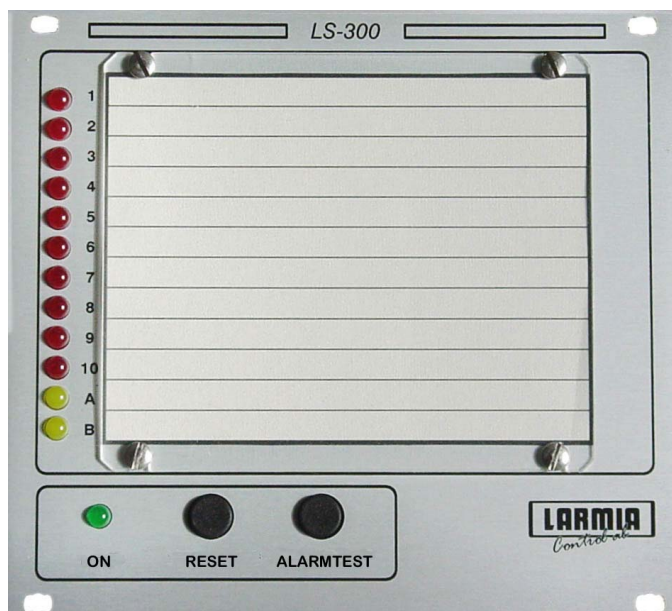

Function

10 input signals each with memory, adjustable delay and selection for make (NO) or break (NC) contact.

Priority level A or B is selectable with jumpers for each input signal.

Alarm gives flashing light which goes to continuous light after reset.

Button for reset and alarmtest.

All selections and adjustments are made from the frontpanel.

Terminal blocks are of plug in type.

Plasticsign in the front is protected by plastic-cover.

Technical specification

Power requirement: Standard 24V AC/DC. Option 12V AC/DC.

Current consumption: max 300mA (in rest 60 mA) at 24V AC.

Priority level contact rating: max 1A, 50V at 24W or 120VA.

Adjustable delaytime: 0,1 - 30s.

Alarm contact current: 3mA

Dimension: W x H x D 154 x 123 x 45mm.

Plug-in card

LS 320 One individual outputrelay (NO/NC) for each alarmsignal (inputcontrolled) and distance reset.

LARMIA CONTROL AB

POSTADDRESS
Box 83
SE-191 22 Sollentuna
Sweden

BESÖKSADDRESS
Visiting address
Aniaraplatsen 4, 3tr

LEVERANSADDRESS
Shipping address
Allfarvägen 3
SE-191 47 Sollentuna

TELEFON
Telephone
08-444 53 00
+46 8 444 53 00

TELEFAX
Facsimile
08-444 53 19
+46 8 444 53 19

EMAIL
Info@larmia.se
Website
www.larmia.se

LS 300 TERMINALBLOCK CONNECTION BLOCK A

<u>Terminal</u>	<u>Function</u>
1	Input signal 1
2	Input signal 2
/	/
/	/
/	/
10	Input signal 10
11	Input signal Common
12	Input voltage AC/DC
13	"
14	Priority level A * NO
15	" COM
16	" NC
17	Priority level B * NO
18	" COM
19	" NC
20	Option (LS 301)
21	"
22	"

* Function after reset at power on.

LS 300 TERMINALBLOCK CONNECTION BLOCK B

PLUG-IN CARD LS 320

<u>Terminal</u>	<u>Function</u>
1	Output relay 1 NO
2	" NO
/	/
/	/
/	/
17	Output relay 9 NO
18	" NO
19	Output relay 10 NO
20	" NO
21	Input for distance reset
22	"

LARMIA CONTROL AB

POSTADDRESS
Box 83
SE-191 22 Sollentuna
Sweden

BESÖKSADDRESS
Visiting address
Aniaraplatsen 4, 3tr

LEVERANSADDRESS
Shipping address
Allfarvägen 3
SE-191 47 Sollentuna

TELEFON
Telephone
08-444 53 00
+46 8 444 53 00

TELEFAX
Facsimile
08-444 53 19
+46 8 444 53 19

EMAIL
Info@larmia.se
Website
www.larmia.se